

MULTI-HOLE CABLE GLANDS



Material

Body: PA 6 (Poyamide 6)

Cap: PA 6 (Polamide 6)

Seal: CR (Chloroprene Rubber)

Flammability

V2 (According to UL 94)

Protection Class

IP68 - 5 Bar (72.5 psi)


Operating Temperature

Permanent: -20°C to +100°C (-4°F to +212°F)

Intermittent: -30°C to +150°C (-22°F to +302°F)

Thread

ANSI B 1.20.1

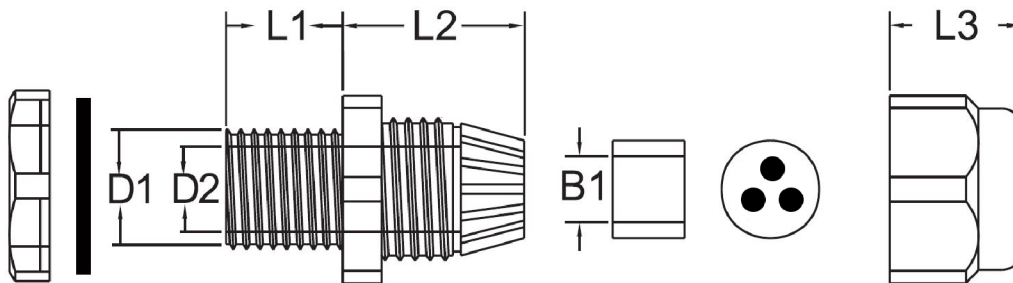

Multi Hole NPT Gland Specs (mm)

	D1	D2	L1	L2	L3	# Holes	Hole Dia	Units/Bag
MH-NPT-38-2x4	11.1	16.8	14.8	22.6	14.5	2	4	20
MH-NPT-38-3x3	11.8	16.8	15.6	24.1	16.3	3	3	20
MH-NPT-12-3x4	15.2	20.5	13.3	26.7	17.7	3	4	20
MH-NPT-12-2x6	15.9	20.5	13.3	29.6	17.7	2	6	20
MH-NPT-34-2x8	19.8	26.0	15.1	30.1	23.2	2	8	20